

Product code EF-3A000G02G-A03

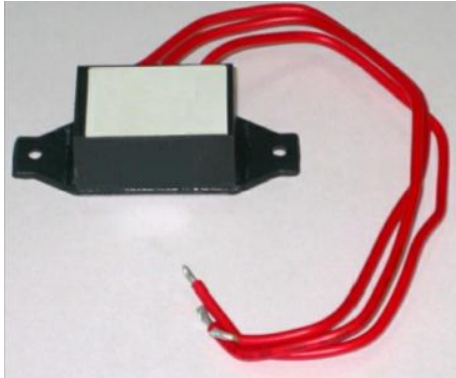


Image shown is for illustrative purpose only


Features and benefits

- Provides overvoltage protection
- Connection through 16 AWG (1.5 sq mm) flexible wire length 200 mm each.
- Weight approx. 50 gram.

Conformance



Electrical schematic



Technical specifications

Nominal operating voltage phase, to phase	440 VAC
Clamping voltage	710 VAC
Maximum peak current pulse	10000 Amps.
Response time	< 25 Nano sec
Rated Pulse energy	303 joules

Descriptions

Three phase three wire 440 (Phase-Phase) VAC transient surge suppressor module.

Mechanical details

All dimensions in mm.

Tolerance = ± 1 mm

