

Product code EF-3P000G08G-A04



Image shown is for illustrative purpose only

Conformance




Features and benefits

- Provides overvoltage protection
- Connection through (18 AWG) 0.75 sq mm flexible wire of 150mm.
- Weight approx. 60 gram.

Technical specifications

Rated peak current pulse	10000 Amps.
Response time	< 25 Nano sec
Rated Pulse energy	303 Joules

Electrical schematic

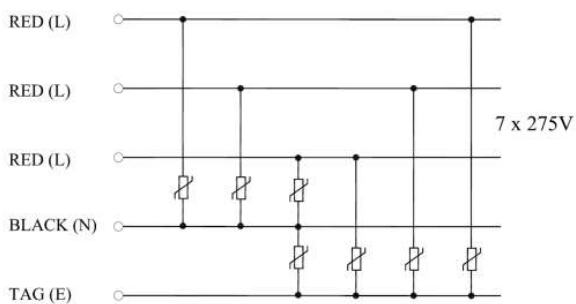

Descriptions

Three phase, 250(Phase-Neutral) / 440(Phase-Phase) VAC, 50/60 Hz transient surge voltage suppression unit, four wire (with neutral) module for Industrial application.

Mechanical details

All dimensions in mm.
Tolerance = ± 1 mm

