


# BR SERIES

CERAMIC ENCASED

AEC-Q200 • RoHS


## FEATURES

- Slim Type
- Metal Plate Type
- Low Inductance
- Power type current sensing resistor
- Twin style now available
- Reduces switching distortion at high frequency
- 2W to 10W
- R01 to 1R8

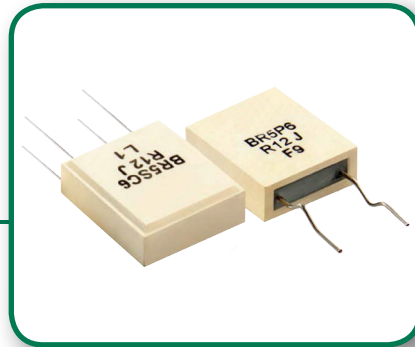

## APPLICATIONS

These low inductance and flame retardant resistors have evolved to become cost effective solutions for applications like the protection of the output transistor in audio visual equipment and current sensing in switching and linear power supplies. By providing low resistance value coupled with low inductance, the switching distortion with high frequency which affects the sound quality of audio equipment is minimized. The very nature of its size and construction makes the BR series thin and light weight which translates into the saving of PCB space.

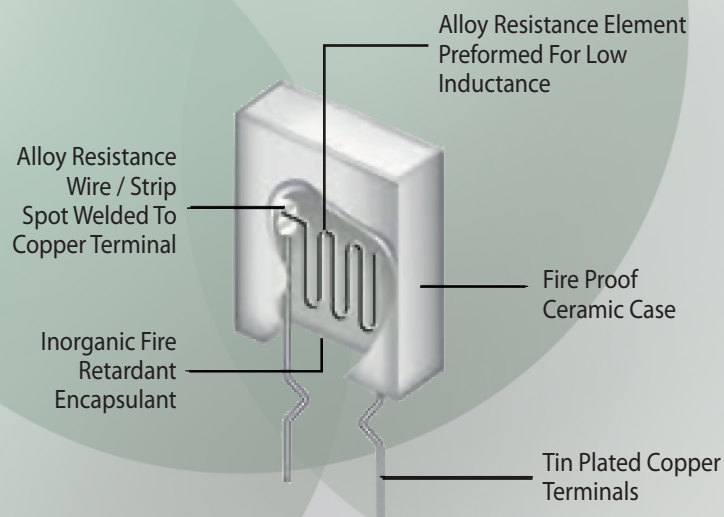


# BR SERIES

## CERAMIC ENCASED


AEC-Q200 • RoHS

### PHYSICAL CONFIGURATION


TYPE BR




TYPE BR-S

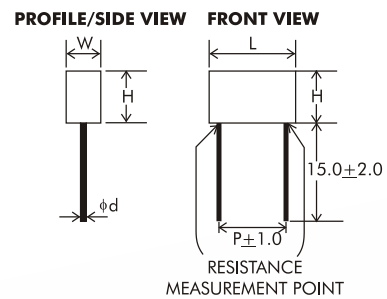

TYPE BR-55

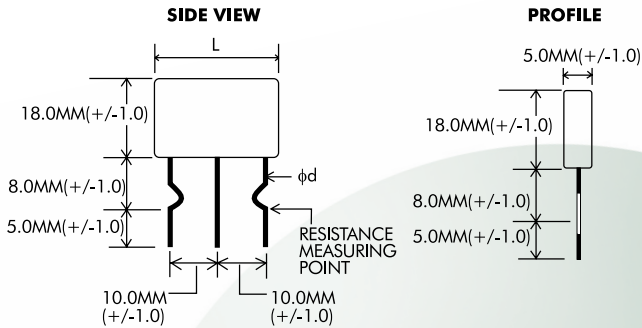

TYPE BR-P

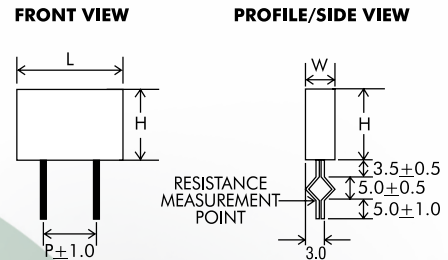

Notes:

Standard tolerance 10%, available 5% e 3%

### DIMENSIONS

TYPE	POWER RATING at 70°C	DIMENSION (mm)					RESISTANCE RANGE		TYPICAL WEIGHT PER PC (gms)
		L	W	H	Ød	P	min	max	
BR-2	2W	14.0	4.5	8.5	0.6/0.8	9.0	R01	R68	1.5
BR-3	3W	14.0	5.0	13.5	0.6/0.8	9.0	R01	R68	2.2
BR-5	5W	15.0	5.0	18.0	0.6/0.8	9.0	R01	1R0	3.4
BR-10	10W	26.5	5.0	18.0	0.8	20.0	R01	1R8	6.4
BR-55	5W+5W	26.5	5.0	18.0	0.8	10+10	R03x2	R47x2	7.0

Notes:

These resistors are available in a choice of 3 mounting configurations to suit the varied needs of different circuit designers.

- Type BR- and BR-P are two different preforming styles.
- Type BR-S has straight leads.
- In the case of BR-55, the deviation in resistance value between the two internal resistors in any one piece is to be maintained at +/- 1% tolerance.
- The measurement point at which the resistance value must be checked is clearly indicated in the diagram given above.
- The resistance values must be checked using 4½ digit micro-ohm meter with four wire system & insulated clips.




# BR SERIES


CERAMIC ENCASED

AEC-Q200 • RoHS

TEMPERATURE RISE CHART

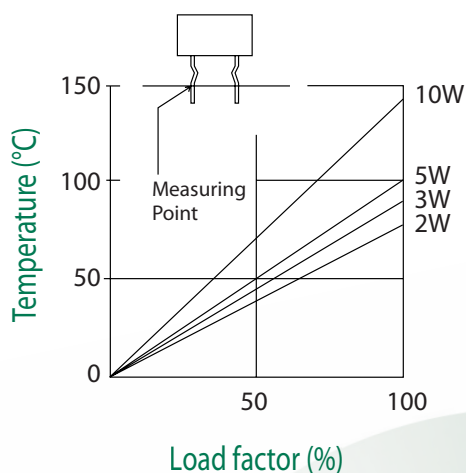

DERATING CURVE

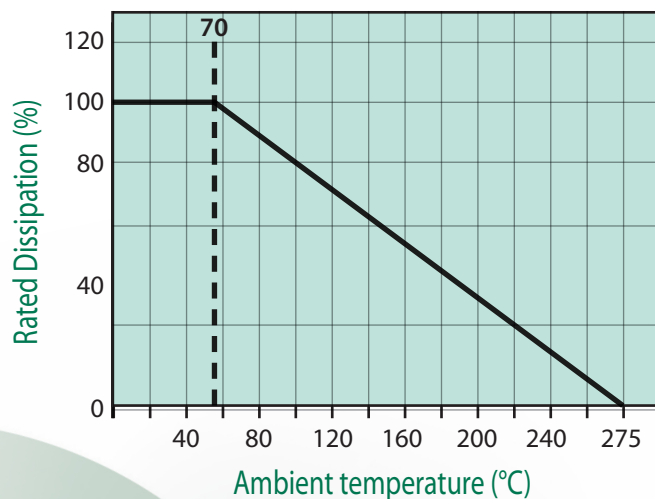

## ELECTRICAL CHARACTERISTICS / DATA

PARAMETER / PERFORMANCE TEST & TEST METHOD	PERFORMANCE REQUIREMENTS
Power Rating (Rated Ambient Temperature)	Full Power dissipation at 70°C and linearly derated to zero at 275°C (Refer Derating curve above)
Operating Temperature Range	-55°C to +275°C with suitable derating as per derating curve
Voltage Rating / Limiting Voltage / Max Working Voltage	$V = \sqrt{P \times R}$
Resistance Tolerances Available JIS - C - 5202 para 5.1	±10% (K); ±5% (J); ±3% (H)
Resistance to Heat (Ambient) Exposure to ambient heat 235°C (+0/-5°C) for 2 hours (-0/+0.1 hours). Test condition - Ambient temperature shall be raised gradually to 235°C from room temperature in 35 to 45 min. and returned to room temperature in the same way. Resistance value to be checked 1 hour after resistor is returned to room temperature.	$\Delta R \pm [2\% + R05]$



# BR SERIES

CERAMIC ENCASED

AEC-Q200 • RoHS

## ELECTRICAL AND ENVIRONMENTAL CHARACTERISTICS / DATA

PARAMETER/ PERFORMANCE TEST	TEST METHOD - DETAILS	Performance Requirements
SHORT TIME OVERLOAD	JIS - C – 5202 para 5.5[Upto 3W - condition A (R.V x 2.5 for 5 secs) 5W and above – condition B (Voltage corresponding to 10 times power for 5 sec)	$\Delta R \pm [2\% + R05]$
DIELECTRIC WITHSTANDING VOLTAGE	JIS - C – 5202 para 5.7 Condition F	$\Delta R \pm [1\% + R05]$
VOLTAGE PROOF	(Limiting voltage x 2 or 500V)	
TEMPERATURE CO-EFFICIENT OF RESISTANCE	JIS - C – 5202 para 5.2	$\pm 325\text{ppm}/^{\circ}\text{C}$
INSULATION RESISTANCE	JIS - C - 5202 para 5.6 (Condition F)	$>1000\text{M}\Omega$ (Min)
ENDURANCE - UNDER LOAD WITH HUMIDITY	JIS - C - 5202 para 7.9 1000 hours at $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 95% R.H with 1/10 limiting voltage (1.5 hours on / 0.5 hours off)	$\Delta R \pm [5\% + R05]$ - Typical
LOAD LIFE	JIS - C - 5202 para 7.10 1000 hours at $70^{\circ}\text{C}$ with limiting voltage (1.5 hours on / 0.5 off)	$\Delta R \pm [\leq 5\% + R05]$ - Average
TEMPERATURE CYCLING	JIS - C - 5202 para 7.4 [Room temperature $\rightarrow -55^{\circ}\text{C} \rightarrow$ Room temperature $\rightarrow 155^{\circ}\text{C} \rightarrow$ Room temperature for 5 cycles]	$\Delta R \pm [2\% + R05]$ - Typical
DAMP HEAT (STEADY STATE)	JIS - C - 5202 para 7.5	$\Delta R \pm [2\% + R05]$ - Average
SOLVENT RESISTANCE	JIS - C - 5202 para 6.9 Solvent A - IPA for 60secs $\pm 10$ secs.	No effect on case filling or marking
RESISTANCE TO SOLDERING HEAT	The terminals shall be immersed in molten solder bath at $260^{\circ}\text{C} (\pm 10^{\circ}\text{C})$ for 3 secs ( $\pm 0.5$ secs). Approximately 4mm from resistor body. (For Pb free solder, please refer to factory)	$\Delta R \pm [1\% + R05]$ - Typical




# BR SERIES

CERAMIC ENCASED

AEC-Q200 • RoHS

## MECHANICAL SPECIFICATIONS

PARAMETER/ PERFORMANCE TEST	TEST METHOD - DETAILS	Performance Requirements
ROBUSTNESS OF TERMINATIONS	Pull Test - Direct load for 15 secs 2 to 4.5 kgs Bend Test - At least 2 times - to 90° and back in both quadrants with 500gms suspended (Refer diagram below)	No effect
NON FLAMMABILITY	JIS - C - 5202 para 7.12.3.1	No effect

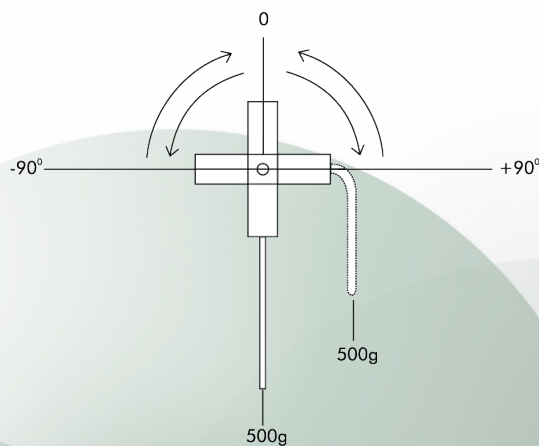

### Notes:

- Types BR-2,3 and 5 are available with choice of lead diameters - 0.6mm or 0.8mm.  
If this is not specified at the time of ordering, the device will be supplied with 0.8mm diameters leads.
- The BR-S type are also available with leads cropped to lengths specified by the customer if required.  
Please contact factory for details.
- The ceramic cases used may be steatite ceramic or cordierite ceramic or high alumina ceramic.

## PART NUMBER

BR	Bulk BRS/BRS	R15	K
Series	Packing	Resistance Value	Tolerance
BR	Bulk BRS/BRS	R15	K (10%) J (5%) H (3%)

